

Sydney Airport

N500 Australian Noise Exposure Index

1 October to 31 December 2016

March 2017

DISCLAIMER

The aircraft noise contours on this chart have been calculated using the best currently available modelling process. The data input to that process are derived from external sources, and Airservices cannot warrant their accuracy. Airservices accepts no liabilities for any reliance placed on any data on this chart by any third party. Airservices accepts no responsibility for any interpretation of this data by third parties.

CONDITIONS OF SUPPLY OF REPORT N500, Dated March 2017

The information contained in this report is the intellectual property of, or licensed to, Airservices Australia and is provided solely for non-commercial use within your organisation. The information may be printed, reproduced and transmitted within your organisation provided that any reproduction is unaltered, shows the date of first publication, and attributes Airservices Australia as its source. The information may not be reproduced or exploited in any other manner whatsoever without the express written permission of Airservices Australia, Environment Branch.

© Airservices Australia - All rights reserved

Airservices Australia

Head Office

25 Constitution Avenue Canberra City ACT 2601 Australia

GPO Box 367 Canberra ACT 2601

Phone1300 301 120Fax02 6268 5683

Contents

1.	Introduction1			
	1.1	Background	.1	
	1.2	Airport Layout	.1	
2.	The I	The Integrated Noise Model (INM)		
	2.1	Development of INM Model	.2	
3.	Meth	odology Used in the Development of the ANEI	.3	
	3.1	Introduction	.3	
	3.2	Collection and verification of the required NFPMS data	.3	
	3.3	Preparation of INM input file	. 3	
	3.4	Running of the Model	.6	
	3.5	Preparation and verification of the model output	.6	
4.	Com	parison of the 2016 ANEI (N500) with the 2015 ANEI (N495)	.6	
	4.1	Comparison of Movement Numbers	.6	
	4.2	Comparison of Runway Use	. 8	
	4.3	Comparison of Population Counts	10	
5.	Num	ber of Aircraft Noise Events Above 70dB(A) Noise Map	11	
	5.1	Introduction	11	
	5.2	Methodology used in the Development of the N70 Aircraft Noise Map	11	
	5.3	Analysis of the N70 Aircraft Noise Map	11	
Attac	hmen	t A	12	
	ANEI	N500 Average Daily Aircraft Movements by Runway	12	
Attac	hmen	t B	19	
	ANEI	N500 Estimated Population within each ANEI Contour by Suburb	19	
Attac	hmen	t C	25	
	ANEI	N500 Contours with INM Terrain Contours	25	
Attac	hmen	t D	27	
	ANEI	N500 Contours	27	
Attac	hmen	t E	29	
	ANEI	N495 Contours	29	
Attac	hmen	t F	31	
	N500	N70 Chart	31	

List of Tables

Table 1.1	Sydney Airport Runway Data	1
Table 1.2	Sydney Airport Meteorological Data	1
Table 3.1	NFPMS Aircraft Movements	3
Table 3.3	Aircraft Types Used by INM for ANEI N500	4
Table 3.4	Comparison of Average Daily Movements	6
Table 4.1	Comparison of Average Daily Runway Movement	7
Table 4.2	Difference of Average Daily Runway Movement	7
Table 4.3	Comparison of Average Daily Long Haul Departures from Runway 34L	7
Table 4.4	Runway Use Comparison	8
Table 4.5	Runway End Impact Comparison	9
Table A1	Average Daily Movements by Runway	13
Table B1	Estimated Population within each ANEI Contour by Suburb	20

List of Figures

Figure 4.1a	Runway Use Comparison – Arrivals	8
Figure 4.1b	Runway Use Comparison - Departures	9

Sydney Airport N500 Australian Noise Exposure Index 1 October 2016 to 31 December 2016

1. Introduction

1.1 Background

In accordance with recommendation 21 of the Proponent's Statement for the Long Term Operating Plan (LTOP) at Sydney Airport, Airservices has prepared an Australian Noise Exposure Index (ANEI) for the period 1 October 2016 to 31 December 2016 inclusive (Reference Number N500).

1.2 Airport Layout

Sydney Airport has three runways. Runway 07/25 (2529m long and 45m wide), Runway 16R/34L (3962m long and 45m wide) and Runway 16L/34R (2438m long and 45m wide). The runway end coordinates and elevations, Aerodrome Reference Point coordinates, elevation data and displaced threshold information for Sydney Airport were obtained from airport data held by Airservices and are shown in Table 1.1.

Location	Latitude	Longitude	Elevation	Displaced
	(WGS84)	(WGS84)	AHD	Landing
			(m)	Threshold (m)
Aerodrome Reference Point	33 56 45.6S	151 10 37.6E	6.4	
Runway End 07	33 56 37.5S	151 09 49.1E	5.3	0m
Runway End 25	33 56 15.1S	151 11 23.8E	6.0	340m
Runway End 16R	33 55 45.7S	151 10 17.8E	2.1	85m
Runway End 34L	33 57 51.4S	151 10 50.4E	4.1	0m
Runway End 16L	33 56 58.6S	151 11 17.9E	4.5	230m
Runway End 34R	33 58 19.0S	151 11 38.1E	3.1	38m
Helipad	33 56 20.4S	151 11 27.2E	6.0	

Table 1.1 Sydney Airport Runway Data

The airport average temperature and humidity were obtained from Bureau of Meteorology (BOM) data. The temperature and humidity shown in Table 1.2 are taken from the BOM data over the study period.

Table 1.2 Sydney Airport Meteorological Data

Airport Average Temperature	21.7°C
Airport Average Humidity	50.9%

2. The Integrated Noise Model (INM)

The Integrated Noise Model version 7.0d (INM 7.0d) developed by the US Federal Aviation Administration (FAA) as a means of evaluating the impact of aircraft noise was used to model the noise contours. Further information regarding INM can be found at:

http://www.faa.gov/about/office_org/headquarters_offices/apl/research/models/inm_model/

INM Version 7.0d is the most recent release of INM. It includes database updates and correction of minor software issues, but no new functionality added relative to INM Version 7.0c. Details of the database updates and changes can be found in the link above.

2.1 Development of INM Model

The flight tracks used in the model were determined from the NFPMS. Flight track plots from the NFPMS were used to identify the major flight paths associated with aircraft movements to and from the airport.

A nominal backbone track for all the major flight paths was identified by means of geographic coordinates along the length of the track and from NFPMS track plots. The corresponding spread for each track was also determined from the NFPMS plots. These tracks were entered into the INM as 'point type' tracks. Each 'nominal backbone track' was prepared with subsidiary tracks that provided a realistic lateral spread of traffic along the nominal tracks.

Including terrain information around the airport improves the accuracy of the contour and was taken into account. Terrain data for the Sydney region was compiled in accordance with the INM User's Guide into a format suitable to be read by INM. The terrain data was aligned to the Aerodrome Reference Point (ARP) and incorporated by INM when calculating the ANEI contours.

The use of terrain data changes the shape of the ANEI contours when compared to a flat ground model. Variances in ground elevation change the distance between the aircraft and the ground, hence the calculated aircraft noise levels at each grid point on the ground.

3. Methodology Used in the Development of the ANEI

3.1 Introduction

The ANEI contour is based on the data collected by Airservices Noise and Flight Path Monitoring System (NFPMS).

The development of the ANEI consisted of the following stages:

- i) collection and verification of the required NFPMS data;
- ii) preparation of the data as INM input files;
- iii) running of the model; and,
- iv) preparation and verification of model's output.

3.2 Collection and verification of the required NFPMS data

Aircraft movement data was obtained from Airservices NFPMS. The total number of movement records from the NFPMS data for the study period is shown in Table 3.1.

Table 3.1 NFPMS Aircraft Movements

Operation	Movements
Arrivals – Fixed Wing	42196
Departures – Fixed Wing	42136
Touch and Go - Fixed Wing	39
Arrivals – Helicopter	359
Departures – Helicopter	363
Touch and Go - Helicopter	1960
Total	89,052 (# see note)

Note that the touch and go movements above have been doubled in the total movement count.

Other sources of data exist within Airservices, (Avcharges data for example) however NFPMS data has been used for this ANEI. NFPMS data at Sydney airport is groomed daily for a high level of data integrity.

There were 4 unknown aircraft movements within the study period. The NFPMS movement numbers were adjusted to account for these. This was achieved by increasing either the arrival or departure number to ensure arrivals equals departures by aircraft type. Touch and Go operations were split into arrivals and departures evenly.

3.3 Preparation of INM input file

The aircraft movement data extracted from the NFPMS were organised into:

- track flown;
- aircraft types and the associated operation (departure or arrival);
- the runway used; and,
- the time of day or night.

For the purposes of modelling and using the Australian Noise Exposure Forecast (ANEF) metric, night is considered to be between the hours of 7:00pm and 7:00am and carries a weighting of 4.

The types of aircraft that operated at Sydney Airport were assigned to 43 representative aircraft types that are contained within the INM database and are shown in Table 3.3. Where possible, the actual aircraft type was matched to its INM counterpart. However, in cases where a particular aircraft type had a small number of movements, it was grouped with a major INM type or INM substitute.

To allocate aircraft operations to flight tracks within the INM study, the geographical track location from the NFPMS was used.

In this study, helicopters were modelled using actual helicopter profiles within INM. Representative helicopter types from INM7.0d were used to assign helicopter movements where possible. Not all helicopter types that operated at Sydney Airport are available for use in INM7.0d. Where it was not possible to use actual helicopter types, representatives were used based on aircraft size. Helicopter types that were unknown were assigned to the representative helicopter type that contained the highest percentage of operations, namely the R44. All helicopters were modelled as arriving to or departing from the Helipad that is located south of the threshold of Runway 25.

INM Type	Aircraft				
717200	Boeing B717-200 aircraft				
737300	Boeing B737-300 aircraft				
737400	Boeing B737-400 aircraft				
737700	Boeing B737-700 aircraft				
737800	Boeing B737-800 aircraft				
747400	Represents B747-400 aircraft				
7478	Represents B747-800 aircraft				
757PW	Boeing B757-200 aircraft				
757RR	Represents T204 (twin engine medium jet) aircraft				
767300	Boeing B767-300 aircraft				
777200	Boeing B777-200 aircraft, A359 - Airbus A350-900 aircraft				
777300	Boeing B777-300 aircraft				
7878R	Boeing B787-800 aircraft, B789 - Boeing B787-900 aircraft				
A319-131	Airbus Industries A319 aircraft				
A320-232	Airbus Industries A320 aircraft				
A330-301	Airbus Industries A330 aircraft				
A340-211	Airbus Industries A340-200 and A340-400 aircraft				
A340-642	Airbus Industries A340-500 and 600 aircraft				
A380-841	Airbus Industries A380 aircraft fitted with RR Trent engines				
A380-861	Airbus Industries A380 aircraft fitted with Engine Alliance engines				

Table 3.3 Aircraft Types Used by INM for ANEI N500

BAE300	Represents BAe146 aircraft
BEC58P	Represents GA twin piston-engine aircraft
CL601	Represents Canadair CL601 Challenger aircraft
CNA208	Represents Pilatus PC-12 and other single engine turbo-prop aircraft
CNA441	Represents GA twin turbine-engine aircraft
DHC6	Represents Twin Otter and similar aircraft
DHC830	Represents Dash 8, FK50 type aircraft
EMB145	Represents Embraer 135 and 145 type aircraft
EMB170	Represents Embraer 170 type aircraft
EMB190	Represents Embraer 190 type aircraft
GASEPF	Represents GA single engine fixed pitch propeller aircraft
GASEPV	Represents GA single engine variable pitch propeller and/or turbine aircraft
F10062	Represents F100 and F70 aircraft
HS748A	Represent AT75, AT76 and ATR 72-212 A aircraft
LEAR35	Represents other small business type jet aircraft, including the G280 – Gulfstream G280 aircraft
MD11GE	Represents DC10 and MD11 type aircraft
SF340	Saab 340 aircraft
B206B3	Bell 206 helicopter aircraft
B407	Bell 407 helicopter
B430	Bell 430 helicopter
EC130	Euro copter EC130 helicopter representing large-medium helicopter types
R22	Robinson R22 helicopter representing small helicopter types
R44	Robinson R44 helicopter, also representing unknown helicopter types

The average daily movements for each aircraft type by runway, time of day and type of operation are shown in Attachment A.

3.4 Running of the Model

The INM was run using standard noise profile data for each of the aircraft types. The parameters used for the ANEF metric were:

Day multiplier	1.0
Night multiplier	4.0

A derivation for the ANEF metric can be found in Australian Standard 2021:2000 *Acoustics, Aircraft Noise Intrusion – Building Siting and Construction.* In accordance with the standard, the evening multiplier is included as part of the night period (7:00pm to 7:00am) and is not modelled.

3.5 Preparation and verification of the model output

The ANEI contours produced by INM were plotted using a GIS software package onto a base map. The contours produced for the 1 Oct - 31 Dec 2016 ANEI (N500) are consistent with flight tracks and the aircraft operations for the period and the use of terrain data.

Table 3.4 shows the average daily aircraft movements for ANEI N500 is 16.3 movements higher than for the same period for the previous year.

Table 3.4 Comparison of Average Daily Movements

ANEI Study	Period	Average Daily Aircraft Movements
N500	1 Oct– 31 Dec 2016	968.8
N495	1 Oct– 31 Dec 2015	952.5

4. Comparison of the 2016 ANEI (N500) with the 2015 ANEI (N495)

The 1 October 2016 to 31 December 2016 ANEI (N500) contours for Sydney Airport are shown in Attachment D. For comparison purposes, the 1 October to 31 December 2015 ANEI (N495) for Sydney Airport has been included as Attachment E. Both contours were produced using INM 7.0d software.

4.1 Comparison of Movement Numbers

The changes evident in the contours for ANEI N500, when compared with the contours for ANEI N495, are consistent with the changes in aircraft types, movement numbers, runway usage, night movements and aircraft flight path use during the two periods.

Table 4.2 shows a comparison of average daily arrival and departure movements by runway for ANEI N500 and ANEI N495. Note that this comparison provides the basis for evaluation of the ANEI N500 contours. When INM disperses the movements assigned for each aircraft type from the nominated 'nominal backbone track' to its subsidiary tracks, there are sometimes slight differences between the reported number of arrivals and departures for that aircraft type, runway or INM study due to rounding.

Runway		ANEI N500			ANEI N495	
	(1 October 2016 to 31 December 2016)		(1 October	2015 to 31 December 2015)		
	Arrivals	Departures	Totals	Arrivals	Departures	Totals
07	5.3	0.7	6.0	13.2	0.0	13.2
16L	71.3	74.0	145.3	64.4	71.0	135.5
16R	99.9	120.5	220.4	91.9	115.6	207.5
25	13.8	11.3	25.1	5.4	3.9	9.4
34L	172.4	118.7	291.1	182.7	119.7	302.5
34R	96.3	134.1	230.3	95.5	142.9	238.4
Helipad	25.3	25.3	50.5	23.0	23.0	46.0
Total	484.4	484.4	968.8	476.3	476.3	952.5

 Table 4.1
 Comparison of Average Daily Runway Movement

Table 4.2 D	Difference of A	Average Daily	/ Runway	/ Movement
-------------	-----------------	---------------	----------	------------

	Diff	Difference N500 - N495							
Runway	Arrivals	Departures	Totals						
7	-7.8	0.6	-7.2						
16L	6.9	2.9	9.8						
16R	8.0	4.9	12.9						
25	8.4	7.3	15.7						
34L	-10.3	-1.0	-11.3						
34R	0.8	-8.9	-8.1						
Helipad	2.3	2.3	4.5						
Total	8.1	8.1	16.3						

Long-haul jet aircraft departing from Runway 34L for destinations in the USA were allocated to a backbone track based on their actual departure track. Table 4.3 shows a comparison of departures that maintained runway heading and those that tracked via the Richmond Two SID and South West Jet SID.

Runway 34L	A	NEI N500	A	NEI N495		
US Departures	(1 October 2	2016 to 31 December 2016)	(1 October 2015 to 31 December 2015)			
	Movements	% of USA Departures	Movements	% of USA Departures		
Maintain Runway Heading	4.1	70%	3.2	59%		
RICHMOND TWO SID / Rwy 34L SOUTH WEST SID	1.7	30%	2.2	41%		
Total	5.8		5.4			

 Table 4.3 Comparison of Average Daily Long Haul Departures from Runway 34L


4.2 Comparison of Runway Use

Table 4.4 shows a comparison of runway usage in the 1 October 2016 to 31 December 2016 ANEI (N500) to the 1 October 2015 to 31 December 2015 ANEI (N495).

Runway	ANE	N500	ANEI N495			
	1 October 2016 to	31 December 2016	1 October 2015 to 31 December 2015			
	N500 Arrivals %	N500 Arrivals N500 Departures N495 A		N495 Departures %		
07	0.6	0.1	1.4	0.0		
16L	7.4	7.6	6.8	7.5		
16R	10.3	12.4	9.7	12.1		
25	1.4	1.2	0.6	0.4		
34L	17.8	12.3	19.2	12.6		
34R	9.9	13.8	10.0	15.0		
Helipad	2.6	2.6	2.4	2.4		

Table 4.4 Runway Use Comparison

Note: Numbers represent percentage of total movements for the respective period of the ANEI and have been rounded to one decimal place.

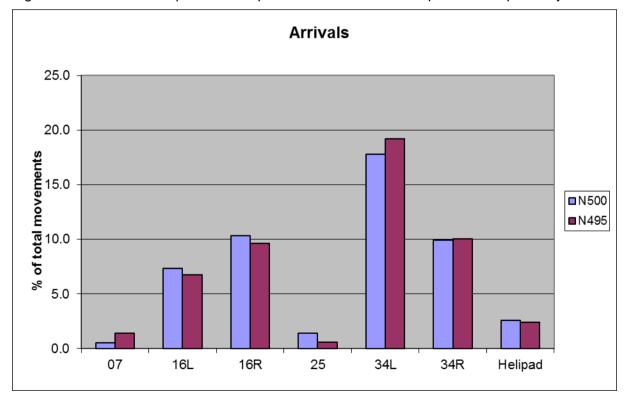

Figures 4.1a and 4.1b depict this comparison for arrivals and departures respectively.

Figure 4.1a Runway Use Comparison – Arrivals

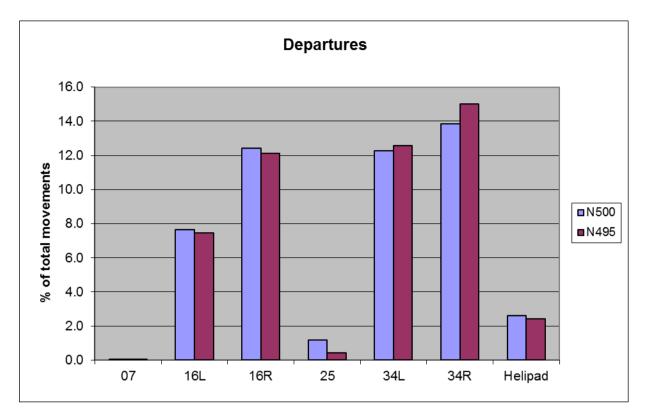


Figure 4.1b Runway Use Comparison - Departures

Table 4.5 details the proportion of aircraft movements to the north, south, east and west of Sydney Airport for ANEI N500 compared with ANEI N495. In calculating the proportion of aircraft movements, helicopter operations were not included. Further information regarding runway end usage should be obtained from the Sydney Operational Statistics Report, <u>http://www.airservicesaustralia.com/publications/reports-and-statistics/sydney-airport-operational-statistics</u>.

Table 4.5	Runway End Impact	Comparison
-----------	-------------------	------------

Direction	Operation		ANEI N500	ANEI N495
	Arrival Runway	Departure Runway	%	%
North	16L and 16R	34L	29.9	29.0
South	34L and 34R	16L and 16R	47.8	48.8
East	25	07 and 34R	15.3	15.6
West	07	25	1.7	1.8

4.3 Comparison of Population Counts

To estimate the population beneath the current ANEI contours, the latest available Census 2011 Mesh Block data and Suburb Boundary information has been used. Mesh Blocks are the smallest geographic region in the Australian Statistical Geography Standard (ASGS), and the smallest geographical unit for which Census data are available. Details of Mesh Block data can be found here:

http://www.abs.gov.au/websitedbs/censushome.nsf/home/meshblockcounts

Previous contour population counts were generated using 2006 Census District information. These included much larger blocks which required some editing of CD boundaries and populations to accurately reflect population distribution in critical areas (close to the airport or flight paths). This editing was not required for the current count due to the improved accuracy of the much smaller Mesh Block data.

The section below compares total population within ANEI contours for the Q4 2016 (N500), Q4 2015 (N495) and the previous annual contour for 2015 (N496).

ANEI	Period	>=20	>=25	>=30	>=35	>=40
N495	1 October 2015 to 31 December 2015	96850	20250	2000	150	0
N496	1 January 2015 to 31 December 2015	94450	18450	2100	150	0
N500	1 October 2016 to 31 December 2016	97150	20400	2000	150	0

Table 4.6	Comparison of Total Population Estimates within each ANEI Contour
-----------	---

Notes:

• 2011 Mesh Block information and has been rounded to the nearest 50. The size of a Mesh Block is much smaller than the size of a suburb.

A more detailed listing of the number of people within the current ANEI contour is shown by suburb in Attachment B. The Census Mesh Block data captured indicates suburb information. In the latest Census data, various suburbs have been grouped together. This grouping can be seen within the tables of Attachment B.

5. Number of Aircraft Noise Events Above 70dB(A) Noise Map

5.1 Introduction

'Number Above' (Nxx) noise maps are an approach which provides additional information on aircraft noise in a form that is more easily understood by the community. The contours provide a visual depiction that shows the number of noise events during a given period that are louder than a selected threshold level. The N70 Aircraft Noise Map for Sydney Airport shows for all areas around the airport how many aircraft noise events louder than 70 dB(A) there were, on a daily average, during the period from 1 October 2016 to 31 December 2016.

70 dB(A) is generally considered to be the external sound level below which no difficulty with reliable communication from radio, television or conversational speech in a typical room with windows open is expected. (Reference - Department of Transport and Regional Services, 2000, *Expanding Ways to Describe and Assess Aircraft Noise*, pp23-35).

5.2 Methodology used in the Development of the N70 Aircraft Noise Map

The N70 aircraft noise map was prepared using the same input files as those for the ANEI contours and was prepared by running the Time-Above (TA) metric, which is a standard metric within INM 7.0d, to produce a detailed grid output file. It is important to note that the TA metric, unlike the ANEF metric, does not use any night weighting in the calculations.

The detailed grid output file was then modified using propriety software and then imported into a GIS software package for plotting onto a base map.

5.3 Analysis of the N70 Aircraft Noise Map

The N70 map prepared for Sydney Airport is shown in Attachment F – Sydney Airport N500 N70 Aircraft Noise Map - 1 October 2016 to 31 December 2016.

The map output is consistent with the patterns that would be expected given the position of the flight paths and the number and types of aircraft using the flight paths modelled in the ANEI (N500).

The N70 aircraft noise map provides information on the total number of aircraft noise events that exceeded 70 dB(A) in a grid area that were likely to have interfered with conversation, sleeping and listening to the radio or television inside a house with the windows open. However, it is important to note the limitations with the N70 aircraft noise maps.

The INM does not provide users with a direct way of computing a 'Number Above' chart, unlike the ANEI and TA contours. It is only possible to derive 'Number Above' values on a rectangular grid, which is then processed for importing into the GIS software package. The accuracy of the N70 contours shown in Attachment F is therefore at best plus or minus 500 metres, the distance between grid points used by INM in the calculations. In addition, the superimposed contours may have incurred errors in the transformation from INM coordinates to the map coordinates that were used in the preparation of the N70 chart.

Attachment A

ANEI N500 Average Daily Aircraft Movements by Runway

Runway	Aircraft Type		Arrivals			Departure		Total
		Day	Night	Total	Day	Night	Total	
07	717200	0.03	0.00	0.03	0.02	0.00	0.02	0.05
07	737300	0.00	0.04	0.04	0.00	0.00	0.00	0.04
07	737400	0.00	0.04	0.04	0.00	0.00	0.00	0.04
07	737800	0.83	0.75	1.58	0.25	0.00	0.25	1.83
07	747400	0.05	0.00	0.05	0.00	0.00	0.00	0.05
07	757PW	0.01	0.03	0.04	0.00	0.00	0.00	0.04
07	767300	0.01	0.02	0.03	0.00	0.00	0.00	0.03
07	777200	0.03	0.00	0.03	0.00	0.00	0.00	0.03
07	777300	0.01	0.02	0.03	0.00	0.00	0.00	0.03
07	7878R	0.05	0.02	0.08	0.02	0.00	0.02	0.10
07	A320-232	0.63	0.64	1.27	0.15	0.00	0.15	1.42
07	A330-301	0.13	0.24	0.37	0.05	0.00	0.05	0.42
07	A340-211	0.00	0.01	0.01	0.00	0.00	0.00	0.01
07	A380-861	0.00	0.03	0.03	0.00	0.00	0.00	0.03
07	BAE300	0.00	0.05	0.05	0.00	0.00	0.00	0.05
07	BEC58P	0.02	0.00	0.02	0.00	0.00	0.00	0.02
07	CL601	0.02	0.00	0.02	0.00	0.00	0.00	0.02
07	DHC6	0.16	0.29	0.46	0.01	0.04	0.05	0.51
07	DHC830	0.45	0.03	0.48	0.05	0.00	0.05	0.53
07	EMB190	0.09	0.09	0.17	0.01	0.00	0.01	0.18
07	HS748A	0.09	0.03	0.12	0.03	0.00	0.03	0.15
07	LEAR35	0.04	0.05	0.10	0.00	0.00	0.00	0.10
07	SF340	0.21	0.05	0.26	0.01	0.00	0.01	0.27
07		2.87	2.47	5.34	0.62	0.04	0.66	6.00

 Table A1
 Average Daily Movements by Runway

Runway	Aircraft Type		Arrivals			Departure		Total
		Day	Night	Total	Day	Night	Total	
16L	717200	1.04	0.02	1.07	1.02	0.18	1.21	2.27
16L	737300	0.02	0.04	0.07	0.02	0.22	0.24	0.30
16L	737400	0.00	0.09	0.09	0.00	0.11	0.11	0.20
16L	737700	0.12	0.01	0.13	0.12	0.01	0.13	0.26
16L	737800	19.40	4.39	23.79	23.21	5.47	28.67	52.47
16L	747400	0.00	0.00	0.00	0.00	0.02	0.02	0.02
16L	757PW	0.02	0.15	0.17	0.04	0.09	0.13	0.30
16L	767300	0.88	0.10	0.98	0.36	0.26	0.62	1.60
16L	777200	0.17	0.00	0.17	0.20	0.00	0.20	0.37
16L	7878R	0.43	0.02	0.46	0.49	0.10	0.59	1.04
16L	A319-131	0.01	0.00	0.01	0.00	0.00	0.00	0.01
16L	A320-232	11.61	3.39	15.00	13.79	4.91	18.71	33.71
16L	A330-301	1.27	0.37	1.64	1.49	0.46	1.95	3.59
16L	BAE300	0.01	0.05	0.07	0.01	0.03	0.04	0.11
16L	BEC58P	0.18	0.03	0.22	0.13	0.01	0.14	0.36
16L	C130	0.00	0.00	0.00	0.01	0.00	0.01	0.01
16L	CL601	0.10	0.04	0.14	0.14	0.00	0.14	0.28
16L	CNA208	0.01	0.01	0.02	0.00	0.00	0.00	0.02
16L	CNA441	0.07	0.00	0.07	0.08	0.00	0.08	0.14
16L	DHC6	1.71	0.65	2.36	1.82	0.47	2.28	4.64
16L	DHC830	10.79	0.90	11.70	7.98	1.20	9.17	20.87
16L	EMB145	0.02	0.01	0.03	0.05	0.00	0.05	0.09
16L	EMB190	2.52	0.42	2.95	2.99	0.83	3.82	6.76
16L	F10062	0.05	0.00	0.05	0.02	0.01	0.03	0.09
16L	HS748A	1.78	0.22	2.00	1.26	0.14	1.40	3.40
16L	LEAR35	0.64	0.14	0.78	0.82	0.13	0.95	1.73
16L	MD11GE	0.00	0.00	0.00	0.00	0.01	0.01	0.01
16L	SF340	6.67	0.70	7.37	3.10	0.18	3.28	10.65
16L		59.55	11.77	71.33	59.14	14.84	73.98	145.30

Runway	Aircraft Type		Arrivals			Departure		Total
		Day	Night	Total	Day	Night	Total	
16R	717200	1.98	0.26	2.24	1.63	0.57	2.20	4.43
16R	737300	0.01	0.20	0.21	0.00	0.37	0.37	0.58
16R	737400	0.00	0.15	0.15	0.00	0.39	0.39	0.54
16R	737700	0.15	0.04	0.20	0.20	0.03	0.23	0.42
16R	737800	21.48	5.82	27.29	21.38	6.07	27.45	54.74
16R	747400	2.01	0.61	2.62	2.20	0.92	3.12	5.74
16R	7478	0.08	0.00	0.08	0.09	0.01	0.10	0.17
16R	757PW	0.04	0.01	0.05	0.01	0.38	0.39	0.45
16R	767300	0.18	0.12	0.30	0.22	0.62	0.84	1.14
16R	777200	1.63	0.01	1.64	1.71	0.04	1.75	3.39
16R	777300	2.34	1.39	3.73	3.41	1.12	4.53	8.26
16R	7878R	3.02	0.20	3.22	2.89	0.64	3.53	6.75
16R	A319-131	0.03	0.00	0.03	0.03	0.02	0.05	0.09
16R	A320-232	11.72	3.96	15.67	12.45	4.49	16.93	32.61
16R	A330-301	11.27	3.90	15.17	12.47	4.82	17.28	32.46
16R	A340-211	0.27	0.05	0.33	0.27	0.09	0.36	0.68
16R	A380-841	1.48	1.24	2.72	2.40	0.91	3.32	6.03
16R	A380-861	0.70	0.85	1.54	0.66	0.91	1.58	3.12
16R	BAE300	0.01	0.34	0.35	0.01	3.35	3.36	3.71
16R	BEC58P	0.29	0.00	0.29	0.32	0.08	0.39	0.68
16R	CL601	0.20	0.01	0.21	0.17	0.04	0.22	0.42
16R	CNA208	0.02	0.00	0.02	0.07	0.01	0.08	0.10
16R	CNA441	0.00	0.00	0.00	0.01	0.02	0.03	0.03
16R	DHC6	1.07	0.66	1.73	2.04	1.04	3.09	4.82
16R	DHC830	5.87	0.45	6.32	8.40	1.04	9.45	15.76
16R	EMB145	0.02	0.00	0.02	0.01	0.00	0.01	0.03
16R	EMB190	2.55	0.51	3.07	2.27	0.49	2.76	5.83
16R	F10062	0.02	0.00	0.02	0.04	0.01	0.05	0.08
16R	HS748A	1.53	0.24	1.77	2.16	0.43	2.60	4.37
16R	LEAR35	0.75	0.34	1.09	1.00	0.46	1.46	2.54
16R	MD11GE	0.57	0.08	0.64	0.11	0.50	0.61	1.25
16R	SF340	6.57	0.66	7.23	8.85	3.11	11.96	19.18
16R		77.86	22.09	99.95	87.48	32.99	120.47	220.41

Runway	Aircraft Type		Arrivals			Departure		Total
		Day	Night	Total	Day	Night	Total	
25	717200	0.22	0.01	0.23	0.15	0.08	0.23	0.46
25	737300	0.00	0.04	0.04	0.00	0.00	0.00	0.04
25	737700	0.03	0.01	0.04	0.01	0.02	0.03	0.08
25	737800	2.82	1.47	4.28	2.82	0.74	3.55	7.84
25	747400	0.14	0.03	0.17	0.10	0.04	0.14	0.32
25	7478	0.00	0.01	0.01	0.01	0.00	0.01	0.02
25	757PW	0.02	0.04	0.07	0.02	0.00	0.02	0.09
25	767300	0.05	0.00	0.05	0.03	0.08	0.11	0.16
25	777200	0.08	0.00	0.08	0.05	0.00	0.05	0.13
25	777300	0.11	0.15	0.26	0.07	0.04	0.11	0.37
25	7878R	0.13	0.08	0.21	0.20	0.01	0.21	0.41
25	A320-232	1.76	0.97	2.73	1.73	0.47	2.20	4.92
25	A330-301	0.68	0.66	1.35	0.76	0.17	0.93	2.28
25	A340-211	0.02	0.02	0.04	0.02	0.01	0.03	0.08
25	A380-841	0.03	0.16	0.20	0.02	0.00	0.02	0.22
25	A380-861	0.02	0.05	0.08	0.03	0.00	0.03	0.11
25	BAE300	0.00	0.02	0.02	0.00	0.00	0.00	0.02
25	BEC58P	0.03	0.00	0.03	0.04	0.02	0.07	0.10
25	CL601	0.00	0.00	0.00	0.00	0.01	0.01	0.01
25	DHC6	0.22	0.21	0.42	0.28	0.14	0.42	0.85
25	DHC830	1.16	0.26	1.42	0.95	0.21	1.15	2.58
25	EMB190	0.35	0.10	0.45	0.35	0.07	0.41	0.86
25	F10062	0.00	0.01	0.01	0.00	0.00	0.00	0.01
25	HS748A	0.28	0.08	0.36	0.27	0.05	0.33	0.68
25	LEAR35	0.15	0.09	0.24	0.11	0.08	0.18	0.42
25	MD11GE	0.05	0.01	0.07	0.01	0.03	0.04	0.11
25	SF340	0.77	0.17	0.95	0.71	0.26	0.97	1.91
25		9.14	4.66	13.80	8.74	2.53	11.27	25.08

Runway	Aircraft Type		Arrivals			Departure		Total
		Day	Night	Total	Day	Night	Total	
34L	717200	2.86	0.40	3.26	0.79	0.07	0.86	4.12
34L	737300	0.00	0.35	0.35	0.01	0.00	0.01	0.36
34L	737400	0.02	0.26	0.28	0.02	0.04	0.07	0.35
34L	737700	0.28	0.10	0.38	0.15	0.01	0.16	0.54
34L	737800	32.96	14.25	47.21	16.11	4.11	20.22	67.42
34L	747400	3.27	1.35	4.62	3.05	1.13	4.18	8.80
34L	7478	0.20	0.00	0.20	0.14	0.03	0.17	0.37
34L	757PW	0.02	0.16	0.18	0.03	0.00	0.03	0.22
34L	767300	0.43	0.16	0.60	0.23	0.59	0.82	1.41
34L	777200	2.39	0.09	2.48	2.27	0.04	2.32	4.79
34L	777300	4.05	2.65	6.71	4.76	1.33	6.09	12.79
34L	7878R	4.70	0.36	5.05	4.15	0.76	4.91	9.97
34L	A319-131	0.04	0.00	0.04	0.04	0.00	0.04	0.09
34L	A320-232	18.17	10.11	28.28	7.87	3.01	10.88	39.16
34L	A330-301	16.84	8.12	24.96	13.66	5.82	19.48	44.43
34L	A340-211	0.38	0.11	0.49	0.30	0.17	0.48	0.97
34L	A380-841	2.43	2.51	4.95	3.30	1.22	4.52	9.47
34L	A380-861	1.05	1.65	2.71	1.00	1.75	2.75	5.46
34L	BAE300	0.00	2.90	2.90	0.00	0.01	0.01	2.91
34L	BEC58P	0.28	0.02	0.30	0.41	0.17	0.59	0.89
34L	CL601	0.23	0.05	0.28	0.07	0.00	0.07	0.35
34L	CNA208	0.03	0.00	0.03	0.02	0.00	0.02	0.05
34L	CNA441	0.02	0.03	0.05	0.01	0.03	0.04	0.10
34L	DHC6	1.73	2.36	4.09	3.53	0.58	4.11	8.20
34L	DHC830	8.96	1.25	10.21	11.61	1.93	13.54	23.75
34L	EMB145	0.02	0.03	0.05	0.01	0.00	0.01	0.07
34L	EMB190	3.67	1.13	4.80	0.83	0.10	0.92	5.73
34L	F10062	0.03	0.01	0.04	0.02	0.01	0.03	0.08
34L	HS748A	2.68	0.61	3.29	3.15	0.78	3.93	7.23
34L	LEAR35	1.14	0.68	1.83	0.76	0.16	0.92	2.75
34L	MD11GE	0.78	0.23	1.01	0.18	0.87	1.05	2.07
34L	SF340	9.25	1.55	10.80	11.96	3.49	15.45	26.25
34L		118.95	53.50	172.45	90.48	28.22	118.70	291.14

Runway	Aircraft Type		Arrivals			Departure		Total
		Day	Night	Total	Day	Night	Total	
34R	717200	1.34	0.00	1.34	2.75	0.90	3.65	4.99
34R	737300	0.01	0.02	0.03	0.01	0.11	0.12	0.15
34R	737400	0.00	0.13	0.13	0.01	0.12	0.13	0.26
34R	737700	0.18	0.02	0.21	0.32	0.09	0.40	0.61
34R	737800	25.77	6.18	31.96	45.35	10.62	55.97	87.92
34R	757PW	0.05	0.12	0.17	0.07	0.05	0.12	0.29
34R	767300	1.15	0.13	1.28	0.52	0.35	0.87	2.15
34R	777200	0.20	0.00	0.20	0.28	0.00	0.28	0.48
34R	7878R	0.80	0.04	0.85	0.59	0.01	0.60	1.45
34R	A319-131	0.00	0.01	0.01	0.00	0.00	0.00	0.01
34R	A320-232	15.46	5.27	20.73	27.64	7.17	34.82	55.54
34R	A330-301	1.85	0.48	2.33	5.16	0.96	6.12	8.45
34R	BAE300	0.00	0.03	0.03	0.00	0.01	0.01	0.04
34R	BEC58P	0.39	0.03	0.42	0.11	0.00	0.11	0.53
34R	C130	0.01	0.00	0.01	0.00	0.00	0.00	0.01
34R	CL601	0.09	0.04	0.13	0.33	0.02	0.35	0.48
34R	CNA208	0.04	0.00	0.04	0.02	0.00	0.02	0.07
34R	CNA441	0.13	0.00	0.13	0.10	0.00	0.10	0.23
34R	DHC6	2.35	0.91	3.26	1.96	0.40	2.36	5.62
34R	DHC830	14.65	1.22	15.87	10.58	2.04	12.62	28.49
34R	EMB145	0.04	0.01	0.05	0.09	0.00	0.09	0.14
34R	EMB190	3.48	0.54	4.02	6.05	1.48	7.53	11.55
34R	F10062	0.13	0.02	0.15	0.08	0.09	0.16	0.32
34R	HS748A	2.25	0.33	2.58	1.57	0.26	1.83	4.40
34R	LEAR35	0.91	0.18	1.10	1.43	0.18	1.62	2.72
34R	SF340	8.34	0.90	9.24	3.88	0.30	4.18	13.42
34R		79.63	16.64	96.27	108.88	25.17	134.05	230.33
Н	B206B3	7.36	0.11	7.47	7.37	0.10	7.47	14.93
Н	B407	0.23	0.01	0.24	0.22	0.02	0.24	0.48
Н	B430	0.15	0.09	0.24	0.20	0.04	0.24	0.48
Н	EC130	4.91	0.23	5.14	4.93	0.21	5.14	10.28
Н	R22	0.04	0.00	0.04	0.04	0.00	0.04	0.09
Н	R44	11.55	0.58	12.13	11.57	0.57	12.13	24.26
Н		24.25	1.01	25.26	24.33	0.93	25.26	50.52
Gr	and Total	372.25	112.14	484.39	379.66	104.73	484.39	968.78

<u>Note</u>

1. Movement numbers in the above table are daily, averaged over the quarter.

2. The above movement numbers have been rounded to two significant figures, as a result minor discrepancies may occur between totals and the sums of component items.

Attachment B


ANEI N500 Estimated Population within each ANEI Contour by Suburb

Table B1 Estimated Population within each ANEI Contour by Suburb

Suburb information is derived directly from the latest Census Mesh Block data. As a result certain suburbs have been grouped together. The Census data has not been altered. The above chart displays the Annual Contour for 2015 (N496) for display purposes. The table shows how the population within the current contour (N500) compares to the counts from the Annual Contour.

ANEI 20 Contour

Suburb	2015 Annual Sum of Residents (N496)	2016 Q4 Sum of Residents (N500)
Arncliffe - Bardwell Valley	3	3
Bexley	1907	179
Botany	5844	5844
Cronulla - Kurnell - Bundeena	1309	1309
Drummoyne - Rodd Point	4572	3498
Dulwich Hill - Lewisham	0	1401
Erskineville - Alexandria	0	172
Kensington - Kingsford	1390	585
Leichhardt - Annandale	10026	10007
Lilyfield - Rozelle	2720	2674
Marrickville	15648	19246
Mascot - Eastlakes	14593	15373
Monterey - Brighton-le-Sands - Kyeemagh	347	502
Newtown - Camperdown - Darlington	8532	7942
Pagewood - Hillsdale - Daceyville	516	482
Petersham - Stanmore	16157	17355
Rockdale - Banksia	3678	3118
Sydenham - Tempe - St Peters	7204	7204
Sydney Airport	3	3
Waterloo - Beaconsfield	0	240
Grand Total	94449	97137

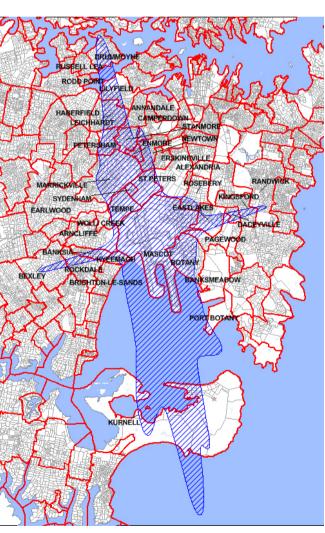


ANEI 25 Contour

Suburb Names	2015 Annual Sum of Residents (N496)	2016 Q4 Sum of Residents (N500)
Botany	1805	2353
Cronulla - Kurnell - Bundeena	0	0
Leichhardt - Annandale	2564	2343
Marrickville	2799	3812
Mascot - Eastlakes	3118	3733
Petersham - Stanmore	4231	4231
Rockdale - Banksia	656	174
Sydenham - Tempe - St Peters	3290	3768
Sydney Airport	3	3
Grand Total	18466	20417




ANEI 30 Contour

Suburb Names	2015 Annual Sum of Residents (N496)	2016 Q4 Sum of Residents (N500)
Botany	196	196
Marrickville	528	528
Mascot - Eastlakes	263	123
Petersham - Stanmore	146	6
Sydenham - Tempe - St Peters	986	1148
Sydney Airport	0	0
Grand Total	2119	2001

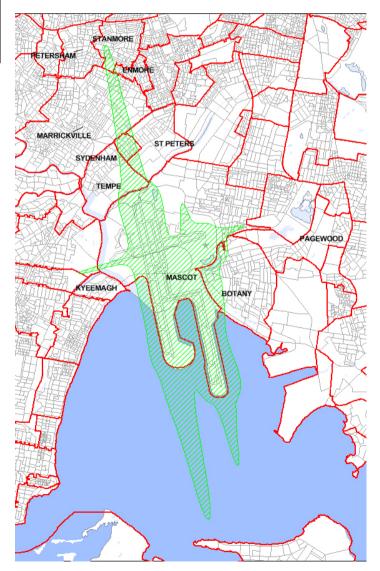


ANEI 35 Contour

Suburb Names	2015 Annual Sum of Residents (N496)	2016 Q4 Sum of Residents (N500)
Botany	0	0
Marrickville	4	4
Sydenham - Tempe - St Peters	136	136
Sydney Airport	0	0
Grand Total	140	140

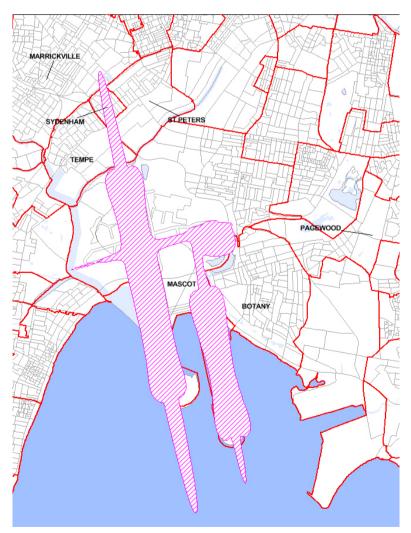

ANEI 40 Contour


Suburb Name	2015 Annual Sum of Residents (N496)	2016 Q4 Sum of Residents (N500)
Sydenham - Tempe - St Peters	0	0
Sydney Airport	0	0
Grand Total	0	0

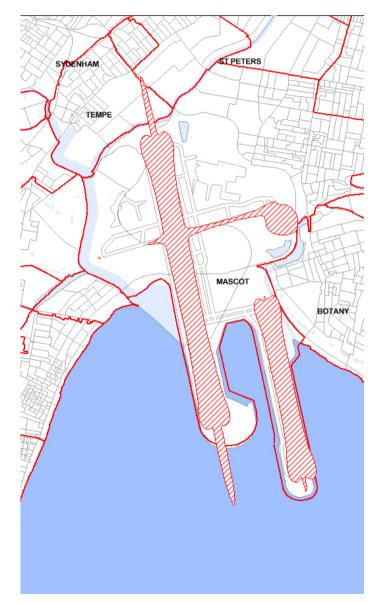

Attachment C

ANEI N500 Contours with INM Terrain Contours

Sydney Airport 1 October 2016 to 31 December 2016

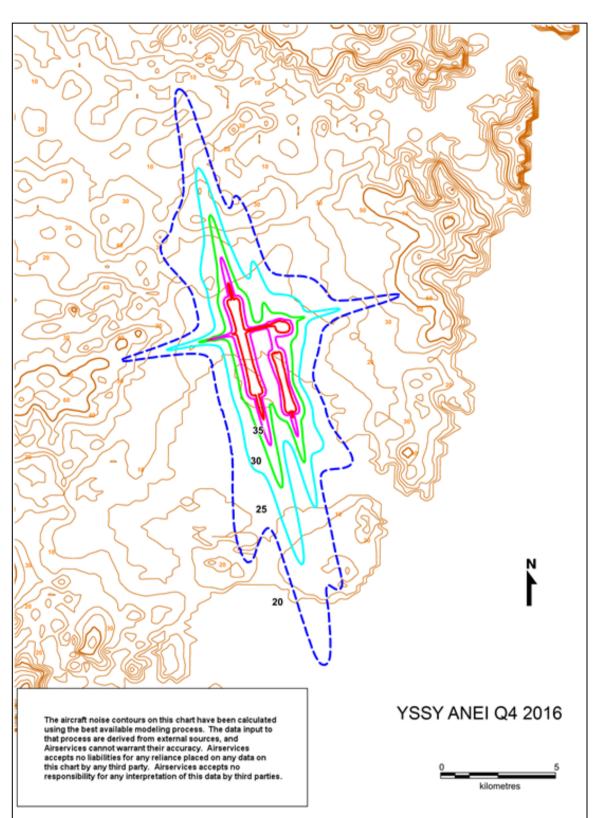


Sydney Airport N500 (1 October 2016 to 31 December 2016) ANEI Contours with Terrain Data

Terrain contour height shown in metres.

Attachment D

ANEI N500 Contours

Sydney Airport 1 October 2016 to 31 December 2016 The contours for ANEI N500 have been prepared using terrain data.

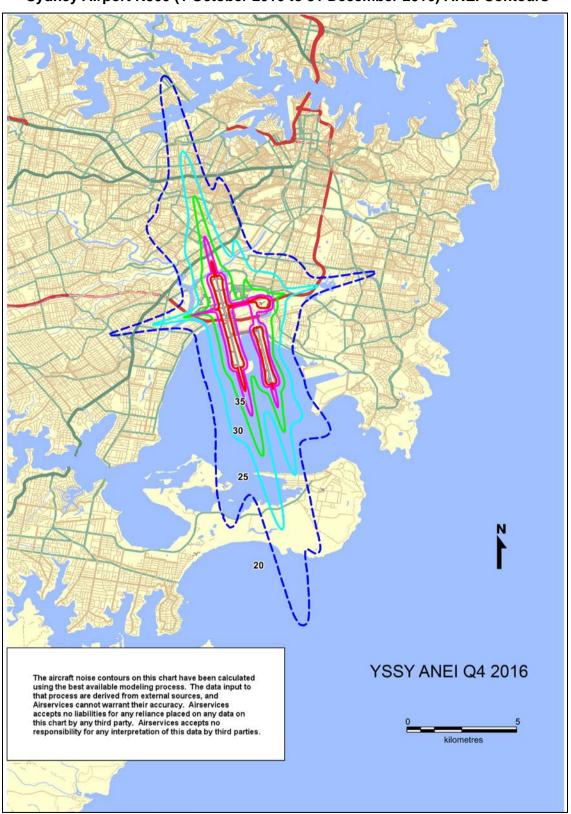

Sydney Airport N500 (1 October 2016 to 31 December 2016) ANEI Contours


ANEI contours modelled by INM 7.0d incorporating terrain data.

Attachment E

ANEI N495 Contours

Sydney Airport 1 October 2015 to 31 December 2015

The contours for ANEI N495 have been prepared using terrain data.

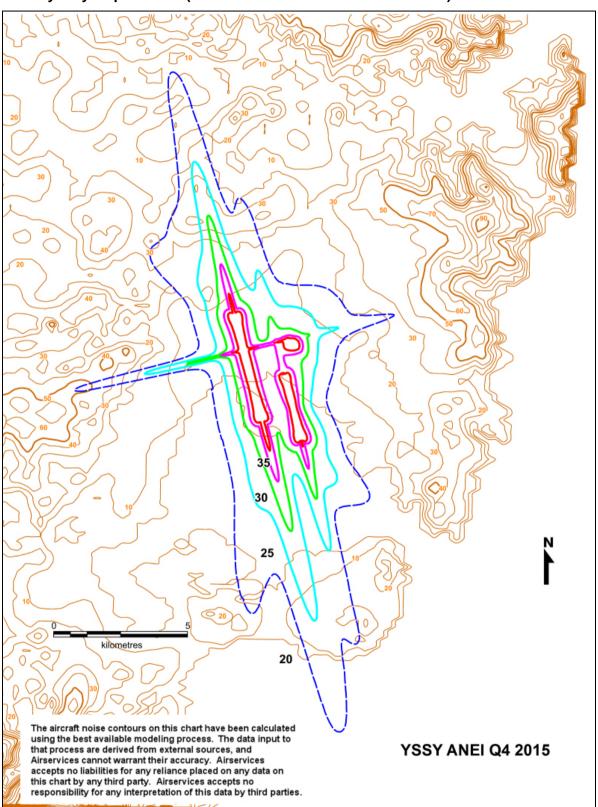


Sydney Airport N495 (1 October 2015 to 31 December 2015) ANEI Contours


ANEI contours modelled by INM 7.0d incorporating terrain data.

Attachment F

N500 N70 Chart

Sydney Airport 1 October 2016 to 31 December 2016

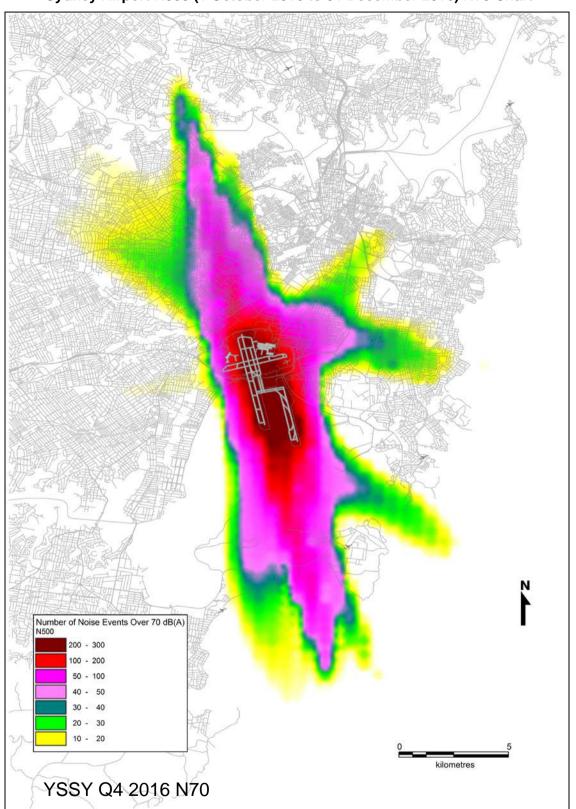



Daily average number of aircraft noise events louder than 70 dB(A).